# POLO PLUS Coax cable to board

## For testing, verification and emulation boards

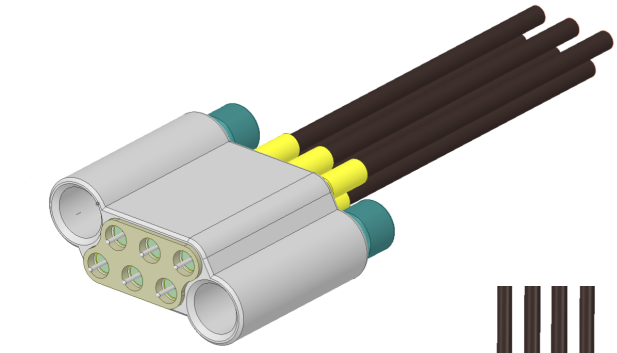



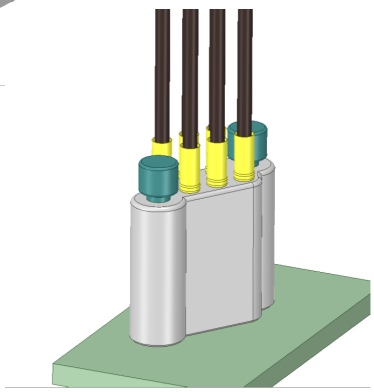

## QUICK FACTS

- High Speed performance allowing differential signalling beyond 16,7 Gbps.
- Contacts at 4 mm pitch single row or staggered dual row limiting required real-estate.
- Combination of proven POLO technology with also proven goldwire technology.
- Standard configurations: single row 4,6 8 and 10 ports, dual row 8,12,16,20.
- Custom configurations or requirements welcome!

## PRODUCT APPLICATION

- Testing and Verification DUT boards
- Emulators and programmers
- In line test and inspection systems
- Sensing & Electroptics

**Markets:**

- Test & Measurement
- Aerospace & Defense.
- Medical imaging
- Analytical instruments

## FEATURES AND BENEFITS

- Fills the gap in high performance differential board connections.
- Combination of proven technologies reduces risks.
- Commercially attractive, combining existing technologies in one envelop.
- Excellent electrical performance provides headroom in your application.

www.joysignal.com
email: info@joysignal.com

**Europe:** www.steeredtechnology.com
email: info@steeredtechnology.com